


## Fields of application

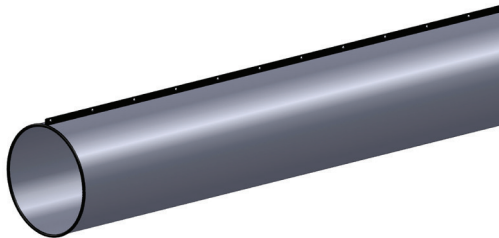

- Air blowing
- Ventilation of miscellaneous large spaces
- Ventilation of underground public works
- Ventilation of mines and quarries

## Benefits

- Cost-effectiveness
- Light-weight product requiring a limited storage volume
- Rapid installation and easy removal
- Exceptional mechanical strength
- Produced in long lengths

## Technical characteristics

- Composition : PVC-coated polyester fabric. Weight 550 g/m<sup>2</sup> +/- 5%
- No reinforcing wire
- Bracket suspension
- Assembly by detachable fasteners as standard, assembly by rings and collars available as an option
- Standard lengths : 10, 25, 50, 100 metres, according to ø
- Internal diameters : 200 - 3000 mm
- Service temperature range: -20 to 70°

## End fittings

Detachable fasteners fitted.

Options:

- Smooth connector sleeves at either end
- Semi-rigid rings and special collars
- Scratch protection (Velcro)
- Detachable fasteners protected by velcro strip

## Suspension

By suspension strip(s) with lugs and brackets.

1-tier for  $\varnothing \leq 1600$  mm and 2-tier for  $\varnothing \geq 1600$  mm



**To contact us:**  
4, rue Jules Verne  
Eurozone de Forbach Nord  
FRANCE - 57600 FORBACH  
[www.partnairindustries.com](http://www.partnairindustries.com)

